

2012 BELL 407GX

SN: 54335 REG: N401TD





sell 407GX

HelINNY.com


Sellacopter™

2012 Bell 407GX

SN: 54335
REG: N401TD

AIRFRAME

Airframe Total Time: 8,694.7 hours
USA Based and N Registered
No Known Damage History
Corporate Charter / Tours

ENGINE

250-C47B
Total Time Since New: 4,163.4 hours
Cycles Since New: 4,639
Serial No: CAE-847147

MAINTENANCE

Complete Records Since New
Part 135 Maintained
Last 12 Month Inspection: Dec 2024
Current Operator: Helicopter Flight Services / Heli NY

EXTERIOR

Gloss Black
Silver Accent Stripes
High Skid Gear w/ Emergency Floats
High Visibility Doors

INTERIOR

Black Leather
Four Point Harness (cockpit)
Corporate Seats and Soundproofing
Air Conditioning and Heater

WEIGHTS

Max Take Off Weight: 5,000 Lbs.
Useful Load: 1,811 Lbs.



2012 Bell 407

SN: 53174

REG: N407SK

(512).877.8993

lan.s@sellacopter.com

www.sellacopter.com

AVIONICS / INSTRUMENTS

Garmin GDU 1040H PFD/MFD

GDC 74H Air Data

GRS 77H ADAHRS Unit

2x GIA 63H VHF Comm

GMA 350H Audio Panel

GTX 33H Transponder

GDL 88 ADS-B In/Out

Radar Altimeter

XM Satellite Radio Kit

406Mhz ELT

ADDITIONAL EQUIPMENT

Engine Inlet Barrier Filter System

Cabin Heat

Cabin Air Conditioning

Tail Rotor Camera

Quiet Mode

28Ah Battery

Corporate Interior w/ Soundproofing

Corporate Armrests

Corporate Leather Seats

Automatic Door Opener Kits (Baggage & Passenger)

Aux Tank Provisions

FloatSteps w/ Float Landing Gear*

Emergency Float Kit*

Jettisonable Door (LH + RH Crew)

Wire Strike Protection System

Rotor Brake

Dual Controls

Specifications and times are subject to verification. Aircraft offered is subject to prior sale, lease, and / or withdrawal from the market.




Sellacopter™



www.sellacopter.com
Reg. expires 06/06/2024
ZDC84 3E130 FF8FF
N401TD

WARNING
MAX AIRSPEED DURING INFLATION OF
EMERGENCY FLOATS IS 80 KIAS
MAX AIRSPEED WITH EMERGENCY
FLOATS INFLATED IS 60 KIAS

EMERGENCY USE ONLY

ELT ARM

TEST / RESET / PRESS TO TEST
HUNT / REC PRESS TO ARM

NAV 114.85 ↔ 188.40
NAV2 110.50 ↔ 117.95

ALERTS
WHEN OIL PRESS
ENGINE OIL
R/FUEL BOOST
L/FUEL BOOST
GEN FAIL
HYDRAULIC SYS
HOG

0.6
1.46
0.9

8730.1 HRS



138.875
123.000 ↔ 127.858

114.85 ↔ 188.40
110.50 ↔ 117.95

801



GEN LOAD MUST BE REDUCED
BELOW 60A TO USE BHT-457-FM-4
HOVER PERFORMANCE CHARTS

AC TEMP CONTROL

NAV 1
COM 1
MISC 1
MISC 2
MISC 3
MISC 4
MISC 5
MISC 6
MISC 7
MISC 8
MISC 9
MISC 10
MISC 11
MISC 12
MISC 13
MISC 14
MISC 15
MISC 16
MISC 17
MISC 18
MISC 19
MISC 20

Sellacopter™




Sellacopter™



TAKE OFF AND LANDING
HEAD REST MUST BE IN
UP POSITION

DANGER
TAIL ROTOR

Sellacopter™




Sellacopter™

183 LITERS
GALLONS = 559 LITERS
ADDED FUELS



heliny.com




Sellacopter™



CAUTION:
INLET EXHAUST PILOT COVERS, ROTOR
DOWN AND BELL FIRST AID KIT MAY BE PLACED
IN EXTENSION AREA WITH SNAP COVER
INSTALLED. REDUCE MAXIMUM ALLOWED
BAGGAGE COMPARTMENT WEIGHT 5 PC.
EXT LOCATED BEHIND SPACE

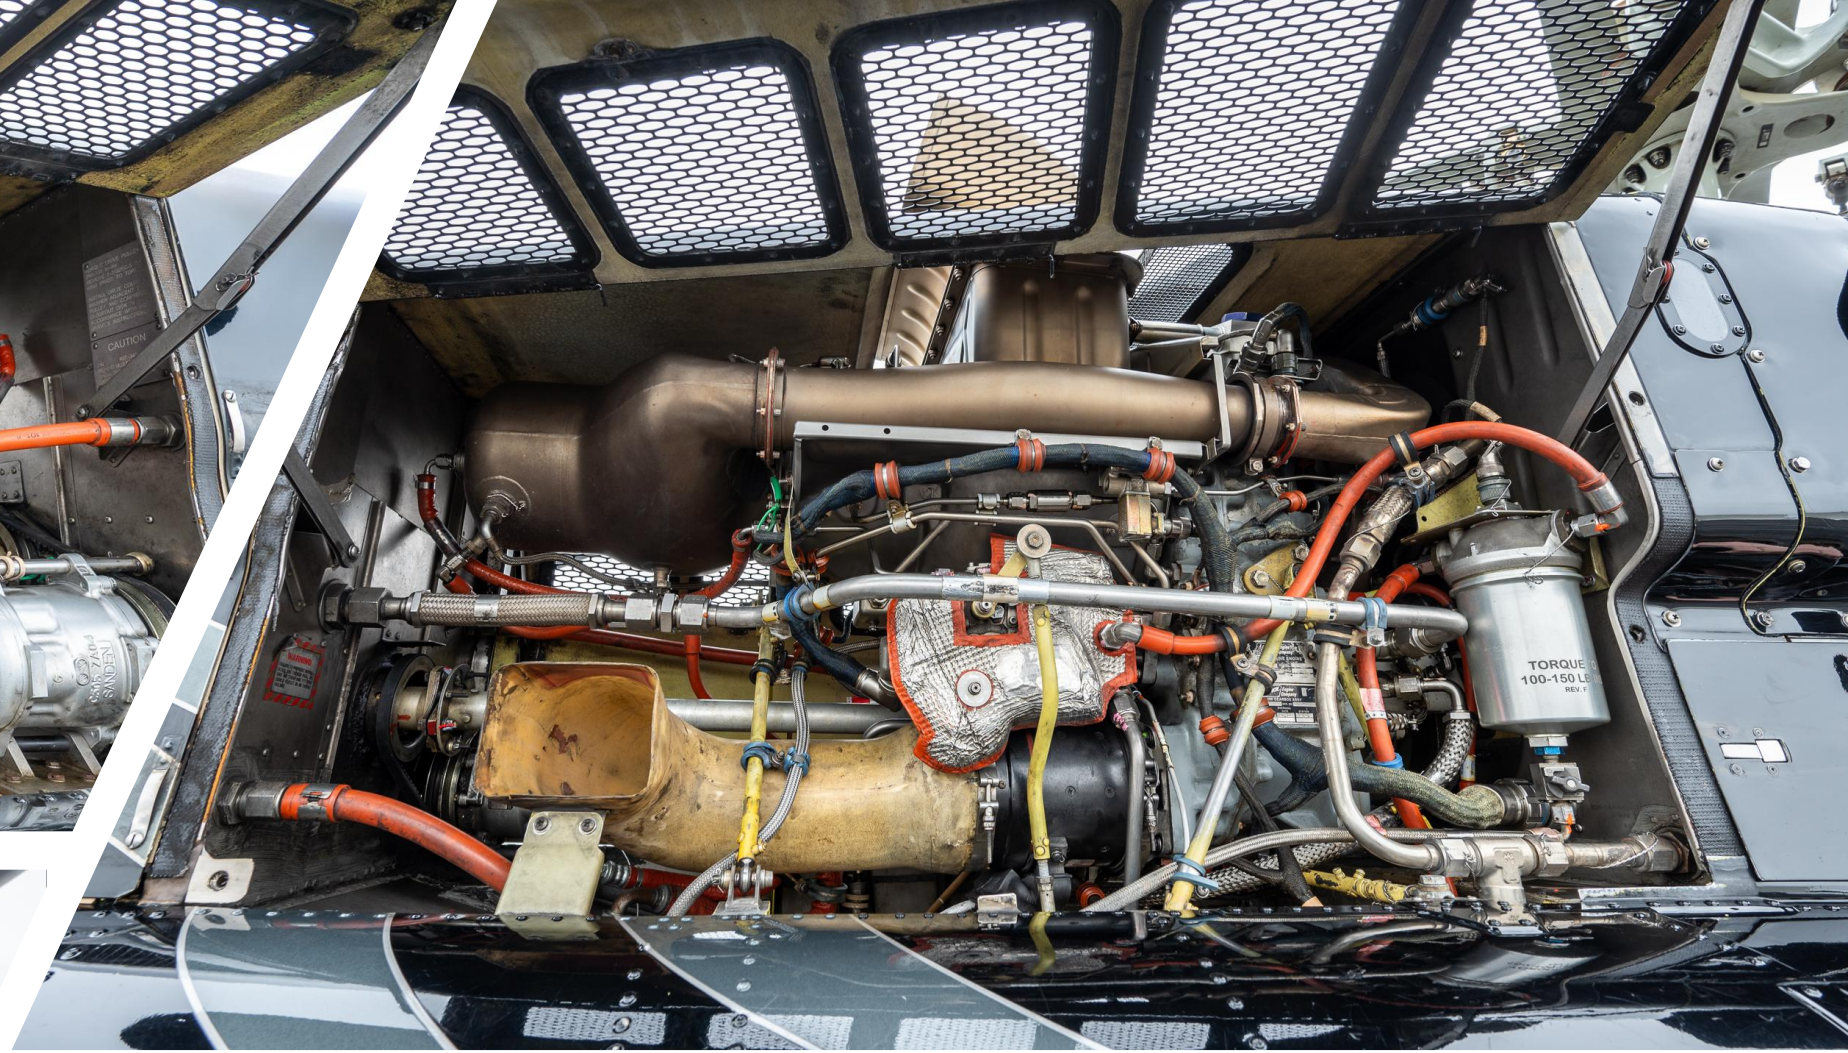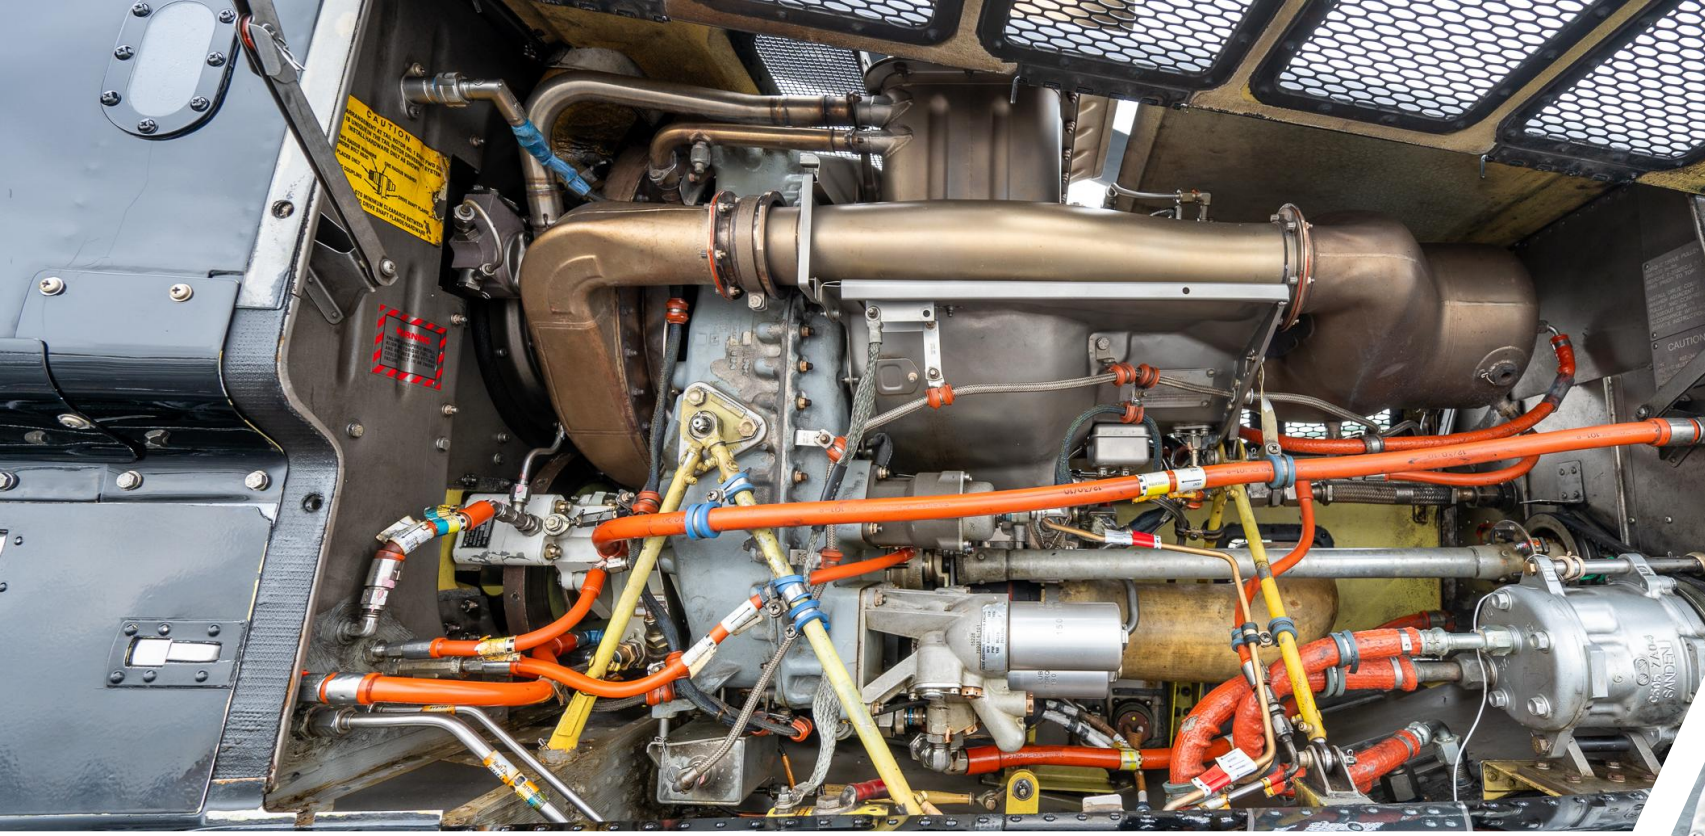

Sellacopter™



 HeliNY.com

DA

Bell
407GX


Sellacopter™



28 VOLTS


Sellacopter™



N401TD




Sellacopter™



1-855-SELLACOPTER (735-5226)

Sales@sellacopter.com

Sellacopter.com